



**Integrated IP Intercom  
For Every Home**



[www.microaxs.com](http://www.microaxs.com)

[www.microaxs.com](http://www.microaxs.com)




# About US


## Who We Are?

MICROAXS is a brand of MICROLINK NETWORKS LLC, its headquarter is in Houston, United States and a family business at a global scale. MICROAXS means smart automation with complete features for the control of lights, window shutters, air conditioning, security and audio etc. We constantly develop, innovate high quality new design, efficiency and user experience trends at the same time all solutions are strictly controlled in terms of quality, thus ensuring an outstanding performance..

# IP & SIP VIDEO INTERCOM

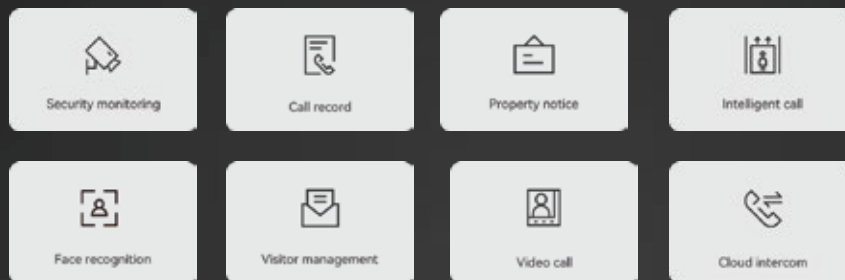

# SIP INTERCOM

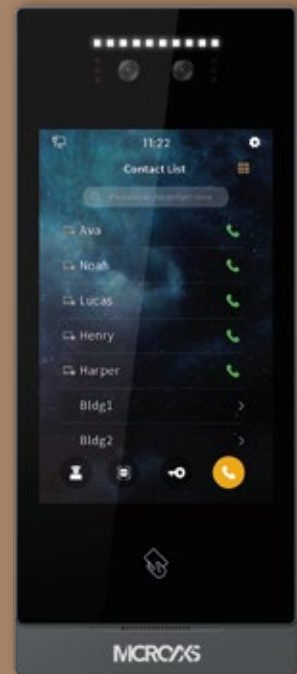


## SIP VIDEO INTERCOM

Based on the SIP protocol, MICROAXS has introduced the video intercom system products, which include indoor monitors, outdoor stations, mini outdoor stations, guard units, and a mobile app that enables remote operation. These products support both point-to-point SIP intercom and cloud intercom, utilizing the SIP server. Experience the seamless integration of SIP protocol VDP

**ALERT!**



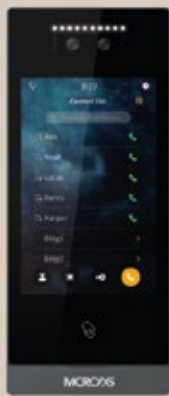


## MX-IP-701-IM



### 7" SIP IP Indoor Monitor (48V)

DC 24V (support standard 48V POE switch), intercom function, 8 defense zones, doorbell function available, RTSP for IP camera integration, resident list, black/white list setting, voice message setting for visitor, smart home integration, built-in multi-language, WIFI connection for cloud intercom, compatible to 3rd party products. Dimension: 182\*119\*14.50mm Available color: Black

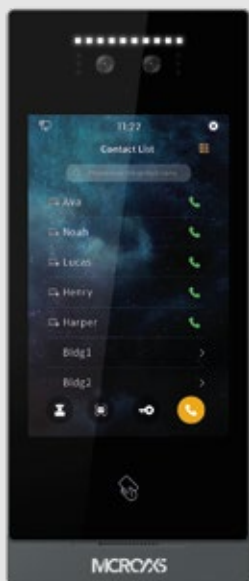

## MX-IP-801-OM

### 8" SIP IP Face Recognition Outdoor Station (2MP)

Dual 2MP COMS camera wide view angle, 9 unlock methods, with human proximity detection and auto fill-light, door status detection and tamper alarm, 2 lock management, compatible with cloud server management and LAN server management mode, support to save 20,000 faces locally, IC card, 3 different installation methods, built-in multi-languages, OTA online upgrade, elevator linkage, can be monitored by APP, IK07



## MX-IP-001-0M



### SIP IP Mini Outdoor Station (48V)

DC 24V(support 48V POE switch), CMOS camera with 2 mega pixel, adjustable camera module with visual angle 95 , built-in IC card reader, door status detection, unlock state timeout alarm, auto fill -light, 2 locks management, flush mounted installation, unlocked by App, Aluminium faceplate, IK07  
Dimension: 120\*194\*44.70mm  
Available color: Silivery

## MX-IP-A01-GU



### 10.1" SIP IP Android Guard Unit(48V)

DC24V( support standard 48V POE switch), resolution: 1280\*800, 10.1" capacitive touch screen, 2MP CMOS Camera, Address book for easy dialing, connection up to 255 cameras, 5 melodies available, Call forwarding function, cards management, wallpaper can be replaced easily, alarm and SOS information treatment, call to all system units,  
Dimension: 210\*356\*31.80mm  
Available colorL Black

# SIP IP Mini Outdoor Station







Support 2 Door  
Locks Management



Support 2 Door  
Locks Management



Adjustable  
Unlock Time



Support 2 Door  
Locks Management

# IP VIDEO INTERCOM



## IP BASE POE VIDEO INTERCOM

IP video intercom system adopts standard TCP/IP protocol network technology, with full digital transmission, full digital control and digital integration. This system has good compatibility and brings excellent intelligent experience for end users.

## MX-IIS-34



### 7" Indoor Monitor (24V)

DC 24V (support 24V POE power supply), standard TCP/IP, resolution 800\*480, automatic photo capture, intercom function, 8 defense zones, SOS calling to guard station, capability to manage elevator and IP camera

## MX-IIS-02-W



### 4.3" Indoor Monitor (24V)

DC 24V (support 24V POE power supply), Touch button controlling, standard TCP/IP, resolution 480\*272, automatic photo capture, intercom function, advanced GUI. Black/White

## MX-IIS-107-W MX-IIS-107-B



### 7" Indoor Monitor (24V)

DC 24V (support POE power supply), standard TCP/IP, resolution 800\*480, automatic photo capture, intercom function, 8 defense zones, advanced GUI, text and photo information, home automation scenario functions. Black/White



## MX-IIS101-W MX-IIS101-B

### 7" Indoor Monitor (24V)

DC 24V (support POE power supply), standard TCP/IP, resolution 1024\*600, automatic photo capture, intercom function, 8 defense zones, SOS calling to guard station, text and photo information, home automation scenario functions. Black/White



## MX-IIS-114

### IP Audio Telephone

DC 24V (support POE power supply), standard TCP/IP, intercom function



## MX-VIS-105

### Slim Outdoor Station (24V Silver)

DC 24V (support 24V POE power supply), Standard TCP/IP, CMOS camera with 0.3 mega pixel, visual angle 95  
Aluminum case, surface installation



## MX-VIS-102-IC

### Villa Outdoor Station (24V Silver)

Standard TCP/IP, CMOS camera with 0.3 mega pixel, visual angle 95 , IC card, door status detection, unlock state timeout alarm, normal open/close, online update, wall-mounted installation. Aluminium faceplate



## MX-VS104-B

### Villa Outdoor Station (24V Black)


Standard TCP/IP, CMOS camera with 0.3 mega pixel, visual angle 95 , IC card, door status detection, unlock state timeout alarm, normal open/close, online update, wall-mounted installation. Aluminium faceplate



## MX-IOS-104-IC

### Main Outdoor Station (4 Buttons /24V)

Standard TCP/IP, CMOS camera with 0.3 mega pixel, visual angle 95 , IC card, door status detection, unlock state timeout alarm, normal open/close, online update, wall-mounted installation. Aluminium faceplate

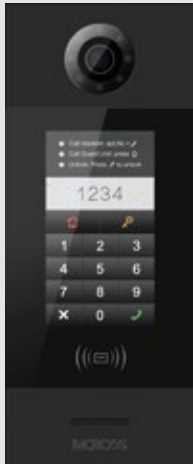

## MX-IO-106-IC

### 7" Face Recognition Outdoor Station (2MP Camera)


DC24V(support 48V POE power supply),Standard TCP/IP with face recognition function, resolution 600\*1024, CMOS camera with 2 mega pixels, visual angle 123 , 7" TFT with advanced GUI, IC card, support 48V POE switch, door status detection, normal-close/open



## MX-IO-108-IC

### 8" Face Recognition Outdoor Station (2MP Camera)

DC24V ONLY. Standard TCP/IP with face recognition function, resolution 800\*1280, CMOS camera with 2 mega pixels, visual angle 123 , 8" TFT with advanced GUI, IC card, , door status detection, normal-close/open

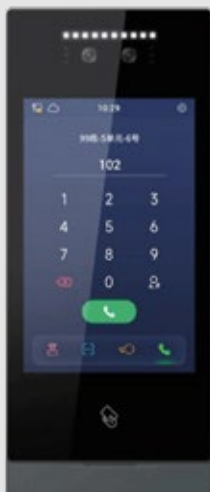

## MX-IO-101-G-IC

### 7" GEM Face Recognition Outdoor Station (2MP Camera)DC24V

Standard TCP/IP with face recognition function, resolution 1024\*600, CMOS camera with 2 mega pixels, visual angle 123 , 7" TFT with advanced GUI, IC card, support 48V POE switch, door status detection, normal-close/open

# MX-IGU-102



## 10.1" Android Guard Unit

Standard TCP/IP, capacitive touch screen  
2MP CMOS Camera, VGA 640\*480 MJPEG,  
connection up to 255 CCTV cameras, 5  
melodies available, Call forwarding function,  
cards management, alarm and SOS infor-  
mation treatment, call to all system units





## USA Office

+1-877-677-4040

[info@microaxs.com](mailto:info@microaxs.com)

Williams Tower, 41st Floor, 2800 Post  
Oak Boulevard, Houston, TX 77056, USA

## UK Office

+44-203-835-2255

[uk@microaxs.com](mailto:uk@microaxs.com)

90-86 Paul Street, London, England,  
United Kingdom, EC2A 4NE

## MENA Office

+971-4-556-1557

[mena@microaxs.com](mailto:mena@microaxs.com)

Boulevard Plaza Tower One, Level 3,  
Downtown Dubai, United Arab Emirates