

MX-VIS-102-IC

4.3" Villa Outdoor Station for
IP Intercom System



Description

Microaxs intercom entry monitors are design-conscious products created as the ideal decorative accessory for your home. But there is more than style to consider. They actually offer an unparalleled level of technology, with functions and features designed to meet all requirements.

Features

- 4.3" TFT LCD display
- Support IC Card
- Auto fill light with high luminance LED
- Door status detection
- Support normally-closed/ normally-opened unlock
- Provide an output DC 12V/ 800 mA(When the input voltage >18V)



MX-VIS-102-IC

4.3" Villa Outdoor Station

Technical Data

Model	MX-VS104-B
System Parameters	
Processor	High-Performance Embedded SOC Processor
Operation system	Embedded Linux Operation System
Video Parameters	
Video compression standard	MJPEG
Resolution	640*480
Video frame rate	25 fps
Audio Parameters	
Audio input	Built-in Omnidirectional Microphone
Audio output	Built-in Loudspeaker
Audio compression standard	G.711 U
Audio compression rate	64 Kbps
Audio quality	Noise Elimination and Echo Cancellation
Access control Parameters	
Internal card reader	Built-in IC Card Reader
Exit button	Exit Button for Opening the Door
Door magnetic detection	Detects Door Magnetic Status
Light Supplement	
Light supplement mode	IR Supplement - Visible Light Supplement
Network Parameters	
Ethernet	10/100 Mbps Self-Adaptive Ethernet
Network protocol	TCP/IP, RTSP
Alarm Parameters	
Alarm input	Door Magnetic Alarm, Tampering Alarm
Device Interfaces	
I/O input	+12V
I/O output	Door lock, Door status detection, Weigand




MX-VIS-102-IC

4.3" Villa Outdoor Station

Technical Data

Model	MX-VIS-102-IC
Material	Aluminum-Alloy
Power supply	24 VDC
Power consumption	≤12 W
Network interface	1 RJ-45 10/100 Mbps Self-Adaptive Ethernet Interface
Working temperature	-20° C to +55° C (-68° F to 131° F)
Working humidity	10% to 90%
IP protection level	IP54
Dimensions (L × W × H)	148.5×363×47mm
Certification	CE, ROHS

Appearance and Interfaces

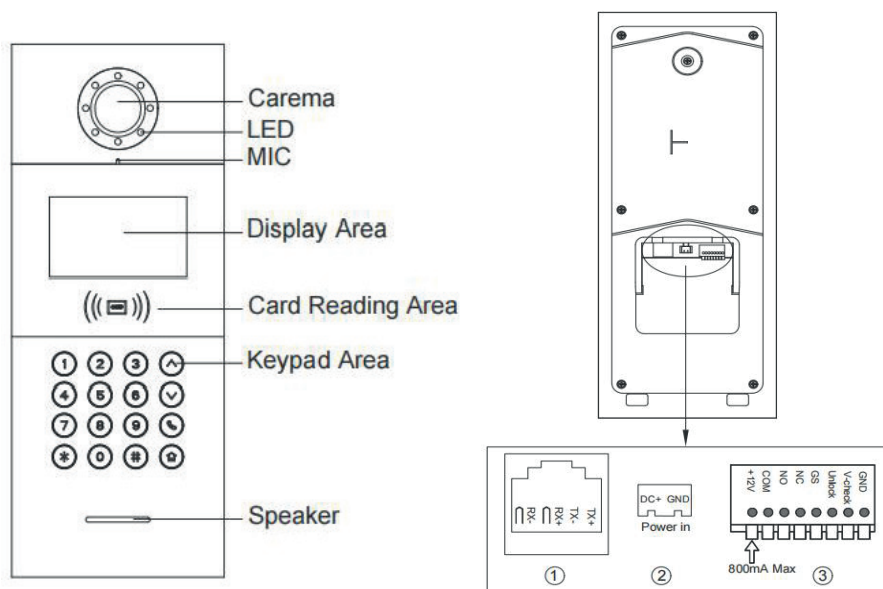

1. Network Interface (Non-standard PoE 24V power supply; if power is needed for gate lock or low temperature heating function is required, outdoor station must be supplied independently).)
2. Interface for input power: DC 24 V (interface for independent power supply)
3. +12V: Only when the outdoor station input voltage >18V, + 12 V voltage is given. If input voltage is + 12 V, the output will be lower than + 10V. COM, NO and NC: Common pin, normally-open pin, and normally-closed pin for the unlock relay.GS: Door status detection input pin. UNLOCK GND: unlock