

Way-2-Easy Lite Kit

7" Touch Indoor Monitor
Outdoor Station
Power Supply

- Intercom Call, Mute, Unlock, Monitoring
- Advanced GUI with user friendly operation
- Intercom call between internal monitor and guard unit
- Screenshot and video record
- 2 wire non-polarity connection



Description

Microaxs intercom entry monitors are design-conscious products created as the ideal decorative accessory for your home. But there is more than style to consider. They actually offer an unparalleled level of technology, with functions and features designed to meet all requirements.

Functions for Indoor station

- Support visual intercom, remote unlock
- Support real-time surveillance to outdoor station
- Support multiple indoor monitors in one apartment
- Support intercom function between other indoor monitors in the same or other apartments
- Support second doorbell

Functions for Outdoor station

- Support calling to Indoor Monitor 1 and Indoor Monitor 2
- Adjustable unlock time
- Door status detection
- Support external camera extension



Way-2-Pro Kit

2-Wire Intercom System



Technical Data

Product	Name	Description
Indoor station	Working Voltage	DC 24~32V
	Working Current	≤ 220 mA (DC 30V)
	Resolution	800×480
	Static Current	30V 15 mA
	Quiescent Current	≤ 20 mA (DC 30V)
	Display	7inch TFT
	Outline Dimension(L×W×D)	220×140×24 mm
Outdoor station	Working Voltage	DC 24~32V
	Working & Storage Temperature	-10°C~+55°C -25°C~70°C
	Static Current	≤ 20mA (DC 30V)
	Working Current	≤ 110mA (DC 30V)
	Dimension(H/W/D)	168×86×26mm
	Camera Type	CMOS
	View Angle	90°(Horizontal)
	White Balance	Automatic
	Resolution	600TVL
	Min. Illumination	0.1 lux
	Fill-in Light Type	Light Sensitive Diode
Power Supply	Input Volt., Current & Freq.Range	AC 100~240V 0.3A Max. 50/60Hz
	No-Load Power Consumption	< 0.5W
	Working Efficiency	85% TYP
	Output Voltage & Output Current	DC 30V 0.6A 0.6A Max.
	Over-Current Protection	0.8A ~ 1.2A
	Short Circuit Protection	Auto-recovery
	Over-Heat Protection	100°C±10°C shutdown
	Lightning Protection	L-N: 1KV
	Working Temp & Storage Temp	-10°C~55°C -20°C~70°C
	Working & Storage Humidity	45%~90%




Way-2-Pro Kit 2-Wire Intercom System


Appearance and Interfaces

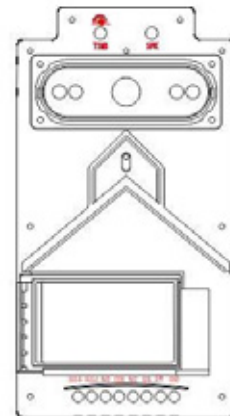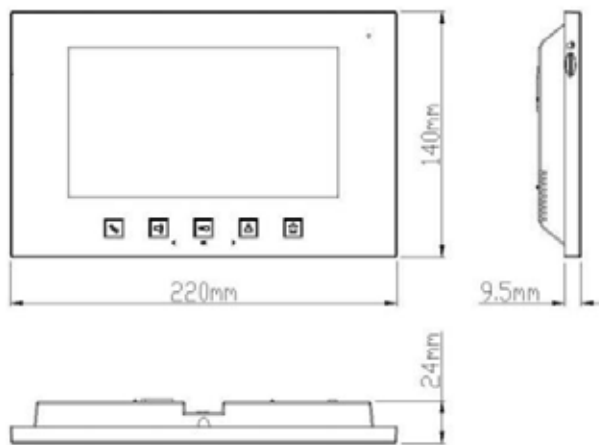

Outdoor Station

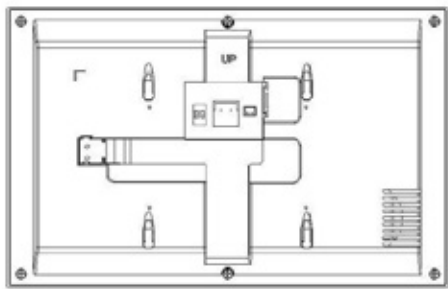

- Number ①**
1: Master/Slave device Setting, turn to M to be Master device and S to be secondary device
2: Impedance Matching, turn 2 to ON when installing the last Indoor Station; Impedance Matching should turn on while the device is connecting to Distributor.
- Number ②** Bus port.
- Number ③** Doorbell port.

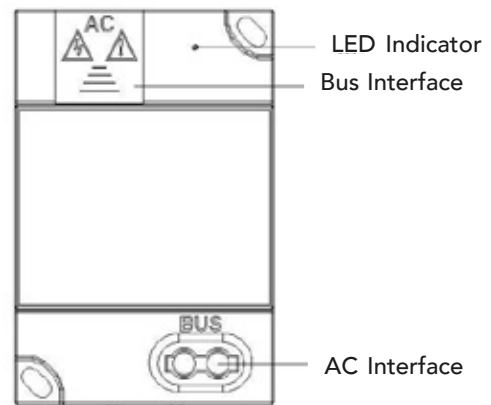

Power Supply

Model Number

- MX-TIS105-W
- MX-TOS-110
- MX-TPS-103