

Latch & Deadbolt

Monitoring Strikes

Compatible with Mechanical, Electrified and Battery Powered

- Cylindrical Locksets
- Mortise Locksets With or Without Deadbolts
- Deadbolts
- Mortise Exit Devices



Features

- Field Adjustable for Latch & Bolt Length.
- SPDT and DPDT Contacts Available.
- For Standard ANSI 2-3/4" or 4.3/4" Strike Plates (Provided by Others).
- Solid Stainless Steel Actuators Installed in Heavy Gauge Strike Back Box.
- Unobtrusive, Vandal Resistant Actuators Are Recessed to Inhibit Tampering.
- All Wiring Maintained in Frame, Eliminating the Need for Power Transfer Devices and Wires in the Door, Maintaining Fire Door Integrity.


Application

- Deadbolt Status.
- Alarm Shunt or Activation.
- Interlock and Mantrap Signaling.
- Door Ajar or Forced Entry Signaling.
- Latch Status & Request-to-Exit for Battery Powered Locks.
- Shared Bathrooms: Ensures Unlocking of Both Doors When Exiting Either Door of a Shared Bathroom.
- Delayed Egress Lock Activation, Eliminates Need for Exit Device Switch and No Wires in Door.
- Latch Status & Request-to-Exit Signaling for Mechanical and Electrified Cylindrical and Mortise Locks & Mortise Exit Devices.



Latch & Deadbolt


Monitoring Strikes

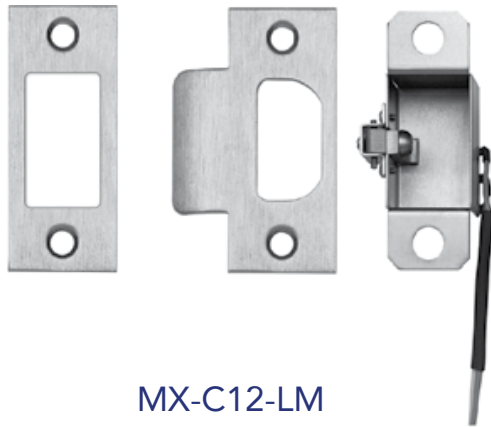


MX-C12-LM




MX-C14-LMA

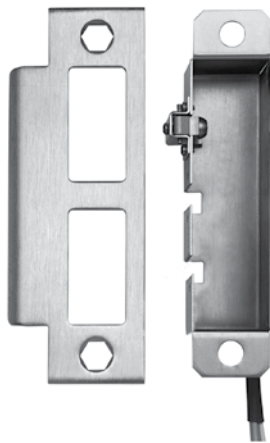

MX-M18-DM

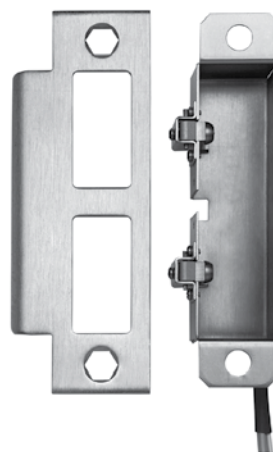

MX-M20-BLM

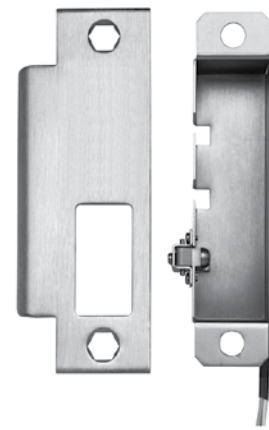

MX-M16-LLM

Model

MX-C12-LM SPDT Cylindrical latch or tubular deadbolt monitor 2-3/4".

MX-C14-LMA SPDT Cylindrical latch monitor 4-7/8".

MX-M16-LLM SPDT Mortise lock latch monitor.

MX-M18-DM SPDT Mortise lock deadbolt monitor.

MX-M20-BLM SPDT Mortise lock latch and deadbolt monitor.