

SIGNATURE SWITCH

KNX Signature Switch Series



Main Features

- Monoblock glass design
- Can be configured with ETS4 / ETS5
- Different color options
- Easy mount into 60x60 mm standard switch junction boxes
- 1 – 12 independent programmable buttons
 - Switching
 - Dimming
 - Blind Control
 - Value Transmitting
- Scene Control

							
Touch Operated	Glass Surface	Frameless Minimalist Design	Switch & Socket Together	Various of Colors	Independent Programmable Keys	Away, Comfort, Night and Protection Modes	Icon Options



SIGNATURE SWITCH

Technical Data


Protection Grade	IP20	EN 60 529
Safety Class	II	EN 61 140
Connections	KNX	Bus Connection
Power Supply	Voltage Current drawn from bus	21V... 30V DC, via the KNX bus <10mA
Operating Elements	LED (red) LED (white)	P. Address Programming LED Button Status LEDs
Operating Temperature	Ambient Storage	-5° C + 45° C -25° C + 55° C
Humidity	Max. Air humidity condensation	95% no moisture
Dimensions	Front side Side – Surface mounted part Side – Flush mounted part	90 x 100 mm 12 mm 18.8 mm
Weight	65 g	
Material	Glass – Surface Polycarbonate – Flush mounted part	
Color	Front Side – Glass – Black or White Flush mounted part – Polycarbonate Black	
CE	In accordance with the EMC guideline and low voltage	




SIGNATURE SWITCH



Functional Elements and Connections

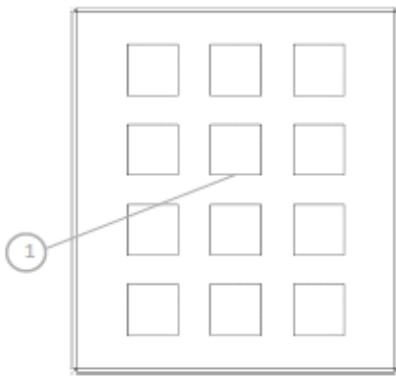


1. Buttons

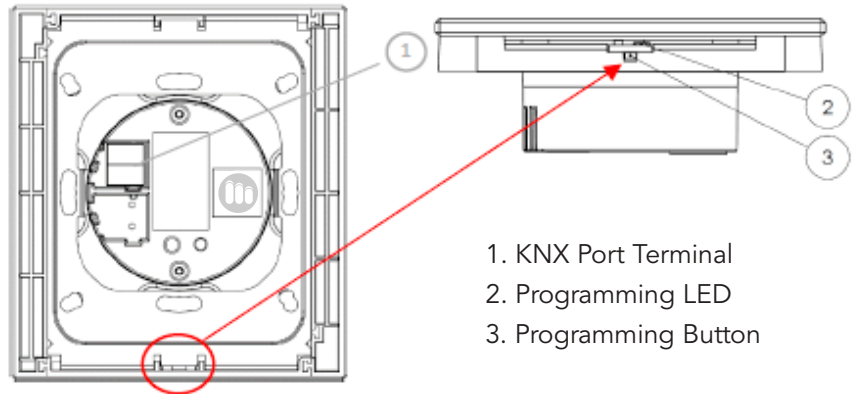

- 1. KNX Port Terminal
- 2. Programming LED
- 3. Programming Button


Technical Drawings

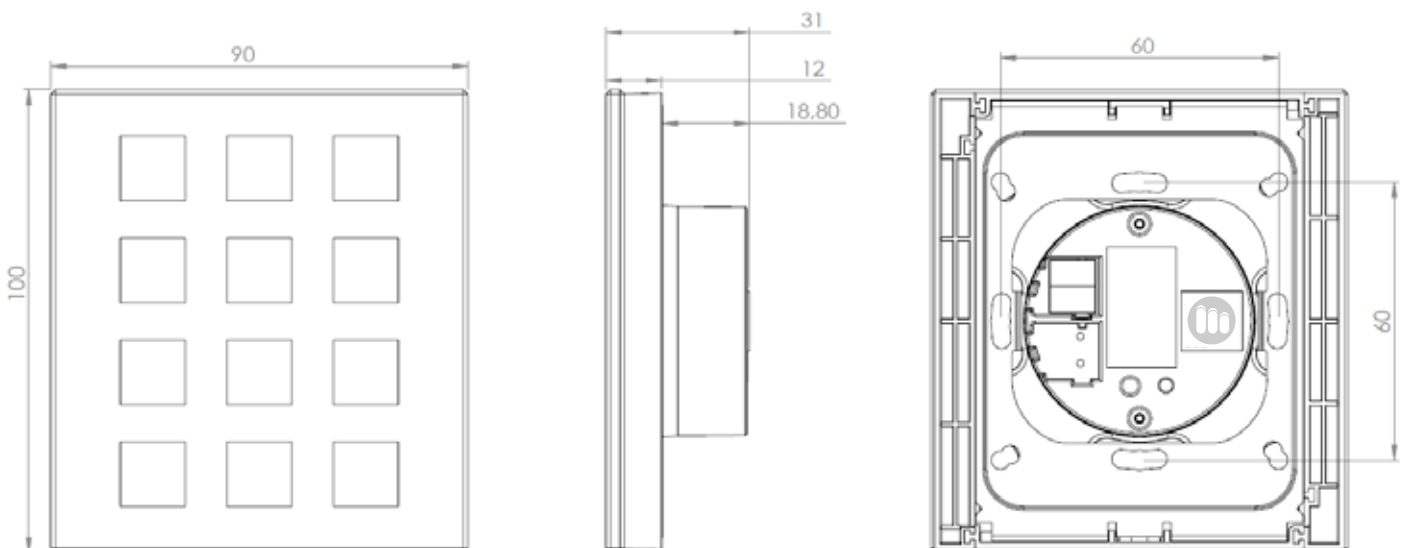


SIGNATURE SWITCH



Scale Drawing 3-gang

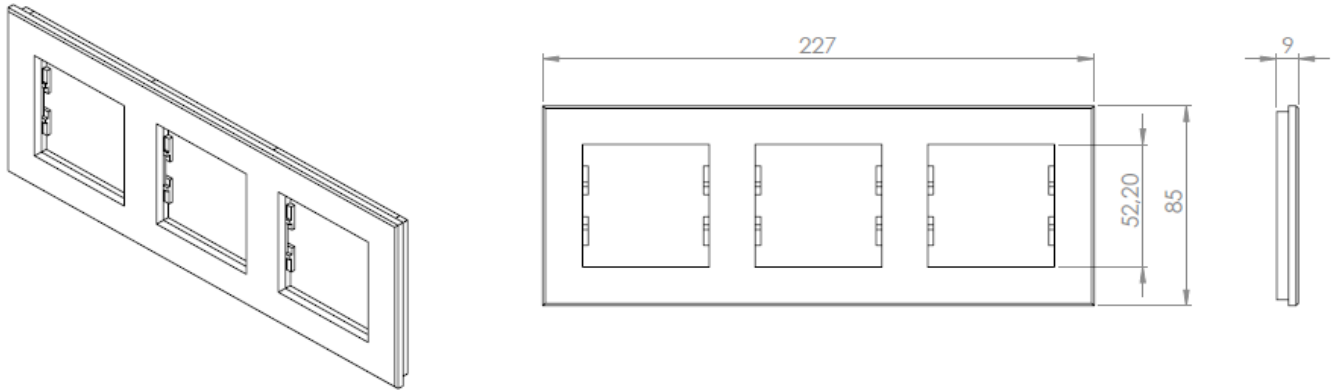

Scale Drawing 4-gang

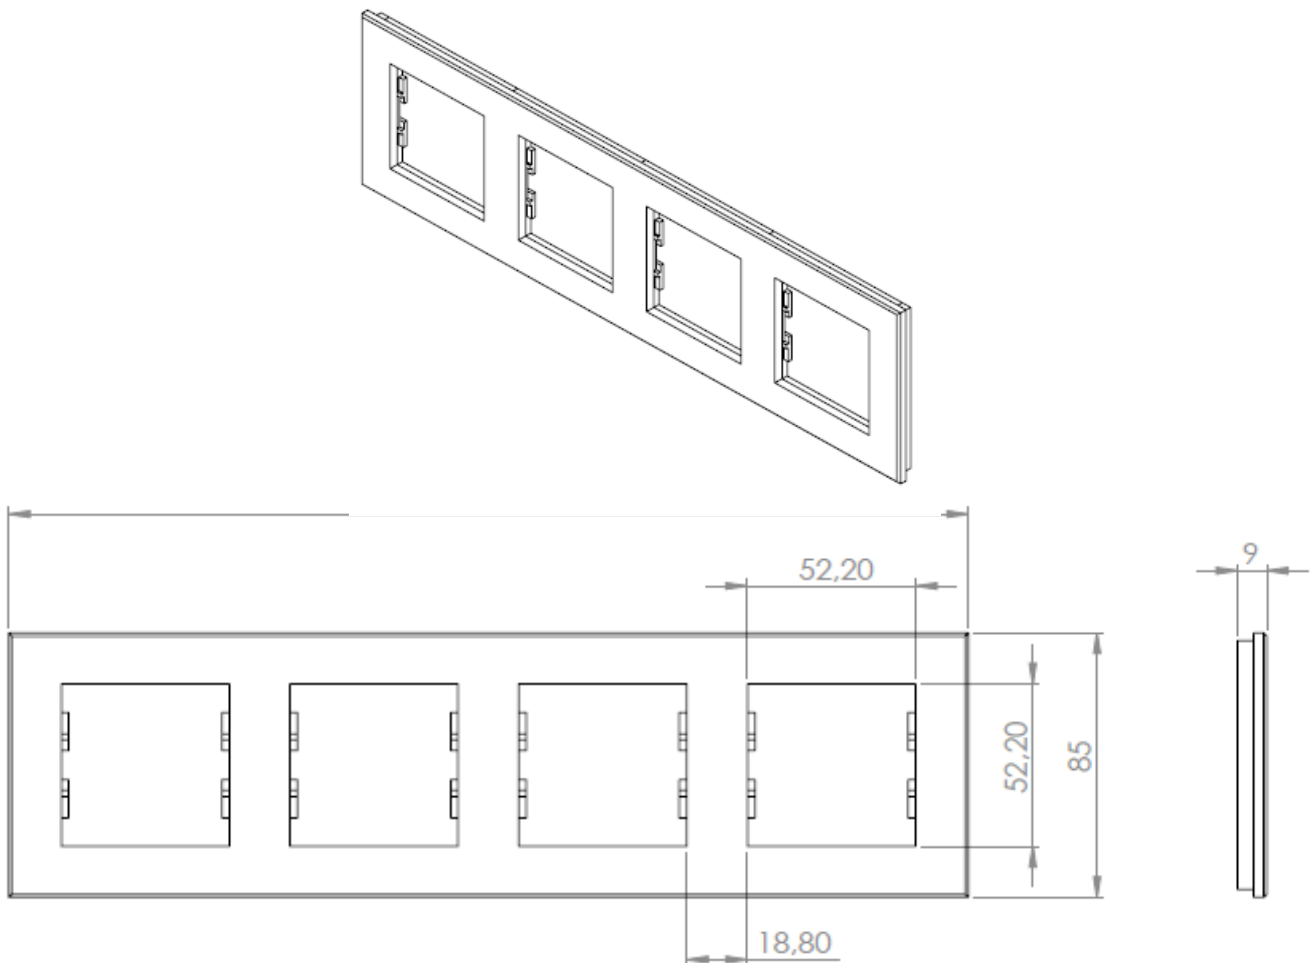

SIGNATURE SWITCH



Scale Drawing 5-gang

