



#### Overview

MX-283 Is Design For Flexible Using Touch Panel With ETS Programming; Building In Laser Human Detect And Humidity, Temperature Sensor. Customer Can Download The Icon And Text With Usb. Support Up To 10 Page .

#### Features

- Brightness setting of background light and screen
- Internet radio, MP3, Bluetooth multimedia functions
- Scene, lighting, floor heating, curtains, color temperature control, RGB control
- Ambient gas display, including CO2, VOC, PM2.5, CO display
- VRV air conditioning control, fan coil control, fresh air control, floor heating control, timing control
- Ambient temperature and humidity detection, humidity alarm
- Automatic dehumidification function
- Detachable amplifier box subassembly, easier to assemble
- Frame plastic, metal optional



\*\*\*\*



## MX-283

## 2.83" Touch Screen Multimedia Panel

6

\*\*\*\*

#### Specification

Model	MX-283
Operating voltage	DC24V
Auxiliary current consumption	≤30mA
Screen size	2.83″
Operating temperature	0°C~45
Storage temperature	-20°C~+80°C
Ambient humidity	≤90% (Removal of water vapor condensation)
Appearance Material/Shell and Color	Flame retardant PC+ABS+Glass+Aluminum Alloy
Dimensions	91.6 x 91.6 x 7.0 mm (L x W x D)
Installation	Wall Mounted Embedded
Protection Level	IP20 (IP protection class according to EN60529 standard)
Mounting Dimensions	78 x 78 x 60mm
Bottom Box Depth Recommendation	60mm
Exterior Material	PC Flame Retardant



TEL: +1-877-677-4040 EMAIL: info@microaxs.com WEBSITE: www.microaxs.com ADDRESS: Williams Tower, 41st Floor, 2800 Post Oak Boulevard, Houston, TX 77056, USA




# MX-283

## 2.83" Touch Screen Multimedia Panel

\*\*\*\*

#### Product Split

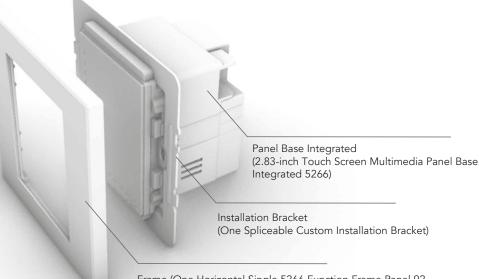

Frame (One Horizontal Single 5266 Function Frame Panel 92 Optional By Material And Color)

#### **Expanded Functions**

