



MX-RF110 Series

Outdoor Access Control Reader

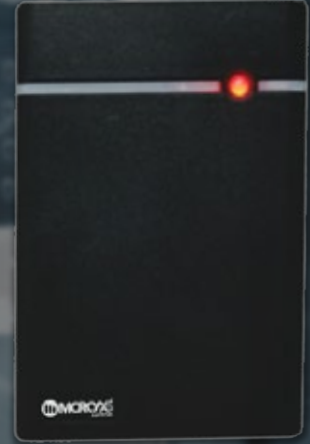

Features

- With buzzer.
- With double color led.
- Ead range: 5~15 cm for EM-ID card or Mifare card.
- Waterproof IP65, solid epoxy potted.
- Output format: wiegand 26 bits (default) / 34 bits, RS485/232 can be customized.
- Suitable for all kinds of access control system.

Specification

Model	MX-RF110MF	MX-RF110EM
RFID Card Type	Mifare IC 13.56MHz	EM-ID 125kHz
Standard Functions	Buzzer, Double Color LED (Red and Green)	
Output Format	Wiegand 26bits (default) / 34 bits, (RS485/232) can be customized)	
Reading Time (Card)	≤300ms	
Color	Black, White	



MX-RF120 Series

Outdoor Access Control Reader

Power / Current	DC5~16V
Material	ABS+PC
Current	≤100mA
Index of Protection	IP65
Ambient Temperature	25°C ~ 75°C
Reading Range	5~15CM
Communication Distance	WG≤100M, RS485≤1200
Size	80*43*16 (mm)
Weight	0.15 kg

Related Images

